

# Specialty Compactors



**CRAM-A-LOT®**  
J.V. Manufacturing, Inc.  
Solid Waste & Recycling Equipment



**“Equipping The World For A Better Environment”**

# Features

**Our Cram-A-Lot specialty compactors are designed specifically for facilities to save space where overall space utilization is critical.**

## THESE POWERFUL UNITS ARE IDEAL FOR:

- Facilities with limited floor space
- Warehouses
- High-Rise Apartments
- Hotels, Offices & Hospitals
- Or anywhere else trash space is very limited

**SAFE  
SIMPLE  
AND  
USER  
FRIENDLY**

## DESIGNED FOR:

- Ease of Installation
- Ease of Operation
- Ease of Maintenance

## X-PRESS PACK

Portable Liquid Tight Self-Contained Unit

Ease of usage makes it a perfect portable trash compactor ready to use and requires no additional sight prep such as concrete pad, anchors or channel guides.



## VERTICAL COMPACTOR

Small Footprint, Frontload service

This compact liquid tight compactor/container is designed to eliminate the need for multiple front load containers. Loading capabilities from the ground, off a dock, or through the wall with optional chute fed systems available.



## APARTMENT COMPACTOR

Extra Tight Space Problems

Designed to solve those extra tight space problems, the apartment compactor packs into a 2yd or 3yd front load or rear load container. These units can be equipped with high-rise chute hoppers, ground feed hoppers, and any other special installation solution requirement.



## CS-01 & CS-02

Limited volume applications

For restrictive applications, we offer a 1 or 2 yard short version of our standard commercial compactor.



# Installed Applications



**CRAM-A-LOT®**  
J.V. Manufacturing, Inc.  
Solid Waste & Recycling Equipment

**Vertical Compactor**



**X-Press Pack**



**CS-02**



**CS-01**



**Apartment Compactor**



**Apartment Compactor**



# Vertical Compactor - CV Series

**Replaces Costly Open Containers - Requires Limited Space**

## FEATURES

- UL/CUL listed Control Panel
- Integral Power Unit
- Control Panel built into side of Compactor
- Key operated controls
- Automatic single-cycle operation
- Door safety interlock
- 3yd, 4yd, 6yd and 8yd container sizes available
- Wastec Rated



**CRAM-A-LOT's CV line of Vertical Compactors are designed to save space and eliminate the need for multiple Front Load containers. This model is ideal for compacting all types of bagged waste, and features liquid tight containment**

## DESIGN FEATURES

- No hydraulic lines attached to the container eliminates the need for driver to exit the truck, saving time and money
- Eliminates the unsightly mess of spillage by the hauler
- Rugged construction provides long life
- Compaction Ratios on Average of 3.5 to 1 depending on material mix
- Ideal for Restaurants, Fast Food locations, Shopping Centers, Supermarkets, Hospitals, Schools, Nursing Homes, and hotels

## LOADING CAPABILITIES

- Can be loaded from the front or rear
- Load from the ground, off a dock, or through the wall
- Feed heights starting at 46 ¾"

## USER FRIENDLY

- Convenient location of control panel

## SAFETY

- Door Safety Interlock
- Safe To Haul Light
- Removable key for authorized operator usage
- ANSI Z245.21 Compliant






**CRAM-A-LOT®**

J.V. Manufacturing, Inc.

Solid Waste & Recycling Equipment

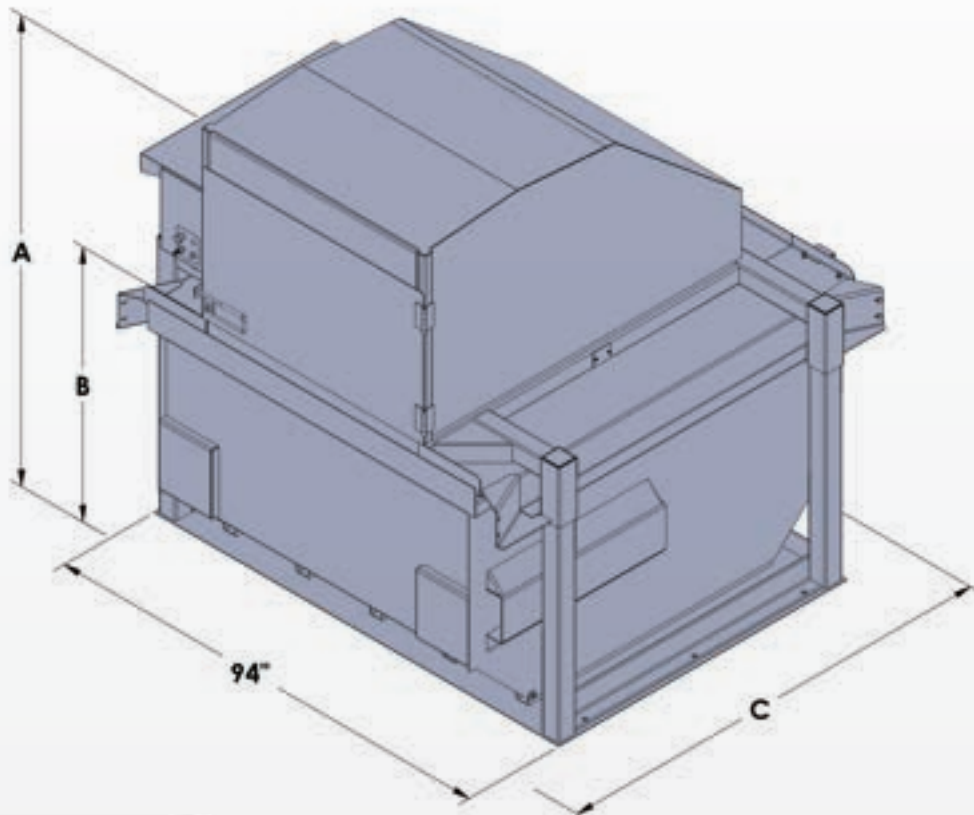

Special modifications quoted upon request

## Specifications

### GENERAL:

|                      |         |                                           |
|----------------------|---------|-------------------------------------------|
| Dimensions           | Length  | 81-1/2"                                   |
|                      | Width   | 94"                                       |
| Clear Top Opening    |         | 48" L x 31" W                             |
| Load Height          |         | See Chart                                 |
| Cycle Time           |         | 37 seconds                                |
| Ram Force            | Normal  | 25,100 lbs                                |
|                      | Maximum | 30,200 lbs                                |
| Ram Penetration      |         | 29.5"                                     |
| Ram Face Dimensions  |         | 48" W x 35" L                             |
| Weight               |         | See Chart                                 |
| Ram Face Pressure    | Normal  | 15.6                                      |
|                      | Maximum | 18.8                                      |
| <b>CONSTRUCTION:</b> |         |                                           |
| Container            | Floor   | 11 gage                                   |
|                      | Sides   | 11 gage                                   |
| Presshead            | Face    | 1/4" Steel Plate<br>Sweeping Blade Design |

### ELECTRICAL:

|                  |                                   |
|------------------|-----------------------------------|
| Motor            | 3 hp                              |
| Voltage          | 208-230/460 VAC 60 Hz Three Phase |
| Optional Voltage | 230 VAC 60 Hz Single Phase        |

### HYDRAULIC:

|                    |                   |
|--------------------|-------------------|
| Pump Type          | Vane              |
| Pump Capacity      | 3 gpm             |
| Tank Capacity      | 8 gal             |
| Hydraulic Cylinder | Bore 4"           |
|                    | Stroke 18"        |
|                    | Rod 2"            |
| Operating Pressure | Normal 2,000 psi  |
|                    | Maximum 2,400 psi |

| MODEL | A        | B       | C       | WEIGHT    |
|-------|----------|---------|---------|-----------|
| CV-03 | 82-3/4"  | 43-1/4" | 93-3/4" | 3,920 lbs |
| CV-04 | 82-3/4"  | 43-1/4" | 91-3/8" | 3,670 lbs |
| CV-06 | 94-3/4"  | 55-1/4" | 91-3/8" | 3,850 lbs |
| CV-08 | 112-3/4" | 73-1/2" | 91-3/8" | 4,050 lbs |


# Vertical Compactor - VCH Series

**Four side loading options.....Five container options....All in ONE unit!!**

## FEATURES

- UL/CUL listed Control Panel
- Integral Power Unit
- Key operated controls
- 3yd, 4yd, 6yd and 8yd container sizes available
- Wastec rated

**Cram-A-Lot VCH line of Vertical Compactors are designed to allow customized loading options along with versatility in container sizes allowing for volume growth without changing compactors**

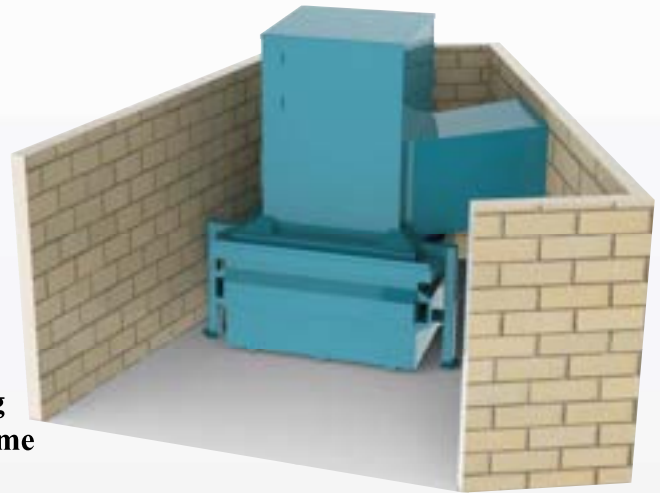

## DESIGN FEATURES

- Sliding feed door is designed to eliminate trash from gathering on top of press head
- No hydraulic lines attached to the container eliminates the need for driver to exit the truck, saving time and money
- Eliminates the mess of spillage when emptying the container
- Rugged construction provides long life
- Compaction ratios average 4 to 1, depending on material mix
- Ideal for Restaurants, Fast Food locations, Shopping Centers, Supermarkets, Hospitals, Schools, Nursing Homes, and Hotels

## LOADING CAPABILITIES

- The VCH serie offers loading capabilities from all 4 sides allowing user front, rear or side feed loading and can be combined with an open chute or thru-the-wall access for customized loading access
- Load from the ground, off a dock, or through the wall
- Feed heights starting at 40 1/4"

## USER FRIENDLY

- Convenient location of controls

## SAFETY


- Door Safety Interlock
- Highly visible "Safe To Haul Light"
- Removable key for authorized operator usage
- ANSI Z245.21 Compliant





**CRAM-A-LOT®**  
**J.V. Manufacturing, Inc.**  
**Solid Waste & Recycling Equipment**

## Specifications

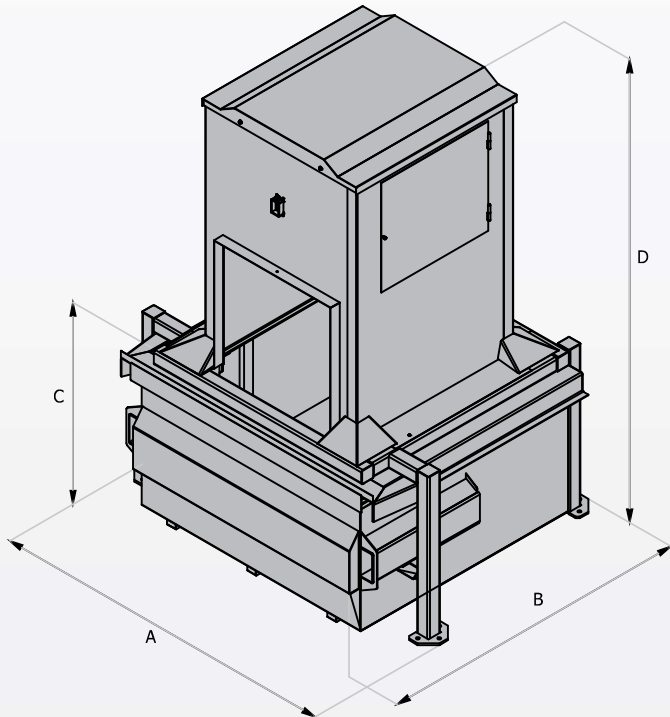

| CONTAINER<br>SIZE / TYPE | A    | B       | C       | D        | COMPACTOR<br>WEIGHT |
|--------------------------|------|---------|---------|----------|---------------------|
| 3-YD-FL                  | 100" | 79"     | 40-1/4" | 115-1/4" | 3892 lbs.           |
| 4-YD-FL                  | 100" | 79"     | 46-1/4" | 121-1/4" | 3973 lbs.           |
| 4-YD-RL                  | 82"  | 100"    | 46-1/4" | 121-1/4" | 4050 lbs.           |
| 5-YD-FL                  | 100" | 79"     | 56-1/4" | 131-1/4" | 4183 lbs.           |
| 6-YD-FL                  | 100" | 95-1/2" | 56-1/4" | 131-1/4" | 4294 lbs.           |
| 8-YD-FL                  | 100" | 95-1/2" | 74"     | 150"     | 4510 lbs.           |

### GENERAL:

|                     |                 |
|---------------------|-----------------|
| Charge Box Capacity | See Chart       |
| Dimensions          | See Chart       |
| Clear Top Opening   | 37 1/4"L x 38"W |
| Cycle Time          | 35 sec          |
| Compaction Force    | 24,650 lbs.     |
| Ram Face Pressure   | 11 psi          |
| Ram Penetration     | 10"             |
| Ram Face Dimensions | 48"L x 48 "W    |
| WASTEC Rated        | 2.08 Cu YDS     |

### CONSTRUCTION

|           |              |                                     |
|-----------|--------------|-------------------------------------|
| Container |              |                                     |
|           | Floor        | 11 ga                               |
|           | Sides        | 11 ga                               |
|           |              | 3" channel                          |
|           | Trim         | 1-1/2" x 1-1/2" x 11 ga square tube |
|           | Lift Pockets | Conform to WASTEC guidelines        |
| Presshead | Sides        | 7 ga                                |
|           | Face         | 1/4" Steel Plate                    |
|           |              | Vertical Push                       |
|           | Guides       | UHMW strips                         |
| Chassis   |              | Steel tube Frame                    |
|           |              | 11 ga. Sheet Steel Shroud           |

### ELECTRICAL:

|         |                                                                                        |
|---------|----------------------------------------------------------------------------------------|
| Motor   | 5 hp                                                                                   |
| Voltage | 208/230/460 Vac 60Hz Three Phase<br>(230 Vac 60Hz single phase)<br>(optional, 1 1/2hp) |

### HYDRAULIC:

|                       |                  |
|-----------------------|------------------|
| Pump Type             | VANE             |
| Pump Capacity         | 6 gpm @ 1800 rpm |
| Tank Capacity         | 12 Gal           |
| Hydraulic Cylinder x2 | Bore 3"          |
|                       | Stroke 37 1/4"   |
|                       | Rod Dia. 2"      |
| Operating Pressure    | 2000 Psi         |

All information is subject to engineering and/or other changes without notice.

Special modifications quoted upon request



# **CRAM-A-LOT®**

**J.V. Manufacturing, Inc.**

***Solid Waste & Recycling Equipment***



## **Leasing and Rental Programs Available**

**Compactor Units can be custom designed  
and factory installed to suit your special applications**

### ***Cram-A-Lot® 1-2-3 Warranty***

J.V. Manufacturing will furnish without charge:

- 1) All parts and labor expenses through the first year of ownership to remedy any faults proven to be the result of defective materials or workmanship.
- 2) All parts through the second year of ownership to remedy any faults proven to be the result of defective materials or workmanship.
- 3) All labor expenses through the third year of ownership to remedy any structural faults proven to be the result of defective materials or workmanship.

This warranty does not apply to any damage caused by negligence, misuse, modifications, alterations, or accidents by purchaser or third parties.  
Refer to operation manual for specific warranty coverage.

#### **CORPORATE OFFICE**

P.O. Box 229  
701 Butterfield Coach Road  
Springdale, AR 72765

1-800-678-7320  
479-751-7320  
479-751-7774 (fax)

#### **DISTRIBUTED BY:**

**[www.cram-a-lot.com](http://www.cram-a-lot.com)**

REVISED 8/25